

Stratus



NATURAL



PARCHMENT



ICE



CORNSILK




GLACIER




STARLIGHT



BUTTERCREAM



OLIVE GROVE



CASARINA




SAND




ELM




TERRA




AGATE




CURRENT




BAHAMAS



TRUFFLE



IRON ORE




GRAPHITE

Satine



SANDSTONE

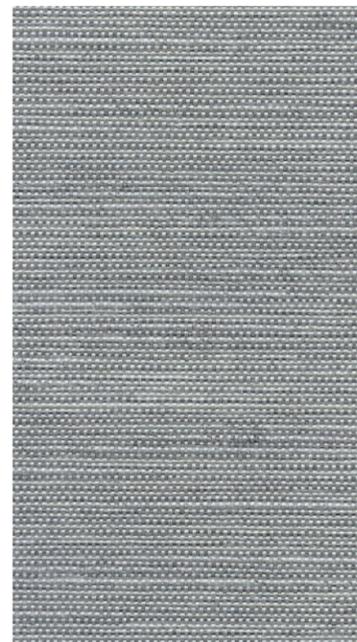


MIST



PARCHMENT



BURLAP




EUCALYPTUS



VANILLA



CAMEL




FOLIAGE



RAFFIA



BAMBOO



FOG



BRASS



CANVAS



STEEL




CUMIN



KHAKI



ARCTIC



TUSCANY



LICHEN




DENIM

Eloquence



TIGER'S EYE



PLATINUM



SILKWORM



OSTRICH



AMBER



GLOW



SLATE

Delight



BIRCH




ECRU



LEAF



FOG



COIN




TARRAGON




STEEL

Bouclé

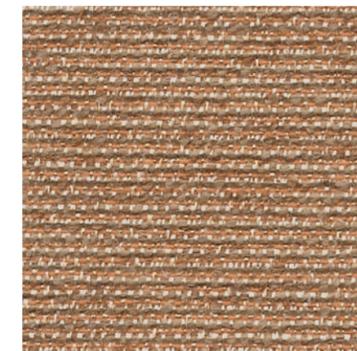

CINNAMON




VANILLA



SAGE




ALUMINUM



WHEAT



SPA



ATLANTIS

Woventex®

100% Polyolefin Panel Fabric Color Selections

SCOPE

The Woventex® collection represents a new generation of contemporary woven panel fabrics. Woventex's woven fabric look in combination with the Telfon® fabric protection system by Dupont and the 100% polyolefin construction makes this a handsome as well as a practical choice. Woventex panel fabrics may be specified for use on the following Panelfold product models: **Scale/8®**, **Scale/12®**, **Sonicwal®**, **Fabricwal®**, **Moduflex®**, **Primespacer®** and **Echosorb™**.

FLAMMABILITY

Tunnel Test: Class A Flame Spread Rating in accordance with ASTM E-84
Corner Burn: Passes UBC 8-2, NFPA 265 Toxicity: MEA #279-90M
Vertical Burn: Passes ANSI A-17 Cigarette Ignition: UFAC Class 1

PERFORMANCE

Colorfastness to Light: Class 5 (over 200 hours)
Colorfastness to Crocking: Class 5 (dry/wet procedure)
Moisture Regain: .05%
Abrasion Resistance: Up to 30,000 minimum cycles (cotton duck)

NOISE REDUCTION

Acoustically transparent per ASTM C-423.

ANTIMICROBIAL

Woventex fabrics will not mildew, rot, or support the growth of bacteria and are non-allergenic.

MAINTENANCE

Woventex panel fabrics are easy to clean. Use traditional cleaning methods: i.e. washing, wiping, brushing, vacuuming. If promptly treated, most indelible stains can be removed by using undiluted chlorine bleach (Clorox) or selected cleaning agents with no damaging effects.

Woventex®

100% Polyolefin Panel Fabric Color Selections



OPERABLE PARTITIONS • ACCORDION PARTITIONS
PORTABLE PARTITIONS • ACOUSTICAL PANELS • FOLDING DOORS

Panelfold, Inc. PO Box 680130 Miami, Florida 33168 • Phone: 305-688-3501 • FAX: 305-688-0185
E-Mail: sales@panelfold.com • Internet: www.panelfold.com

See our other color selections cards for additional woven fabrics, textured vinyls, wood veneers, vertical rib wall carpeting and high pressure laminates available for use on these and other Panelfold Innovative Space Division Systems™.